

KEYSTONE Wall Pack

20W / 30W / 40W | 3CCT | 120-347V



Suitable for use in commercial and industrial building projects needing a sleek, customizable luminaire that enhances building aesthetics.

PRODUCT CODES: KWP-40W-3P-3CCT-UD-BK, KWP-40W-3P-3CCT-UD-BZ, KWP-40W-3P-3CCT-UD-WH



Power Selectable

20W / 30W / 40W

Colour Selectable

3000K / 4000K / 5000K

120-347V Universal Driver

0-10V dimming

Available in Black (BK),
Bronze (BZ), and White (WH)

Built-in Photocell

unplug to bypass

Type II Optics Standard

Type III and Type IV
Interchangeable Optics
sold separately

Motion Sensor Compatible

sold separately



TECHNICAL DATA



LIGHT SPECIFICATIONS

Efficacy	162 lm/W
CCT	3000K/4000K/5000K
CRI	82
Distribution	Type II
Dimmable	0-10V
L70 Life	50,000 hrs
Warranty	10-year
Factory Settings	40W 4000K

LUMEN OUTPUT			
	3000K	4000K	5000K
20W	3649 lm	3722 lm	3796 lm
30W	5416 lm	5566 lm	5616 lm
40W	6372 lm	6548 lm	6599 lm


APPROVALS & LISTINGS

cUL	E482965
DLC Premium	S-MLD8W1

DIMENSIONS AND WEIGHTS

Fixture Weight	3.7 lbs
Fixture Dimensions	10.65 x 9.36 x 6.85 in
Carton Qty	1
Carton Weight	6.38 lbs
Carton Dimensions	12 x 10.3 x 7.8 in

DIMENSIONAL DRAWINGS (IN)

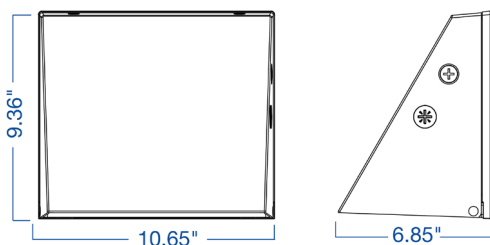

ELECTRICAL

Wattage	20W/30W/40W
Voltage	120-347V
Current	0.4A
Surge Protection	6kV
Auxiliary Output	12V
Power Factor	0.9
THD	15%
Operating Temp	-40 to 50°C
Operating Temp (with Sensor)	-25 to 50°C

CONSTRUCTION

Housing	Die-Cast Aluminum
Lens	Polycarbonate
Finish	Powder Coated
Finish Colour	Black / Bronze / White
IP Rating	IP65

ACCESSORIES (Sold Separately)

Infrared Motion Sensor	MS01-PIR-TW-DC
Microwave Motion Sensor	MS04-MW-TW-DC
Type III Optics	KWP-TYPE-III-SM
Type IV Optics	KWP-TYPE-IV-SM
Motion Sensor Remote	MS04-RC

NOTE: MS04-RC is required for Microwave and Infrared Motion Sensors to function